



## Removal of hexavalent chromium from aqueous solution by raw and chemically modified seaweed *Bifurcaria bifurcata*

T. Ainane<sup>1,2</sup>, A. Abourriche<sup>1</sup>, M. Kabbaj<sup>2</sup>, M. Elkouali<sup>2</sup>,  
A. Bennamara<sup>1</sup>, M. Charrouf<sup>1</sup>, M. Talbi<sup>2</sup>

(1) Biomolecules and organic synthesis laboratory, Faculty of Sciences Ben Msik, University Hassan II, BP 7955 casablanca 20660, Morocco.

(2) Laboratory of Analytical Chemistry and Physical Chemistry of Materials, Faculty of Sciences Ben Msik, University Hassan II, BP 7955 casablanca 20660, Morocco.

Received 11 Nov 2013, Revised 8 May 2014, Accepted 8 May 2014.  
Email: [ainane@gmail.com](mailto:ainane@gmail.com) Tel :00 212 (0) 6 60 39 30 90

### Abstract

The presence of hexavalent chromium Cr(VI) in wastewater is a potential hazard to aquatic animals and humans. There are various mechanisms proposed, kinetic models used and adsorption isotherms employed for the efficient removal of hexavalent chromium from industrial and municipal wastewaters using biosorbents. Biosorption of heavy metals is a most promising technology involved in the removal of toxic metals from industrial waste streams and natural waters. Metal removal treatment systems using natural materials are cheap because of the low cost of sorbent materials used and may represent a practical replacement to conventional processes. The objective of this study is to assess the uptake of hexavalent chromium from aqueous solutions onto *Bifurcaria bifurcata* algae raw and chemically modified. The biosorption data of hexavalent chromium by marine brown algae *Bifurcaria bifurcata*, which was raw RB and chemically modified by hydrochloric acid AB, has been used for kinetic studies based on fractional power, Elovich, pseudo-first order, pseudo-second order and intraparticle diffusion rate expressions. Four two-parameter biosorption isotherm models, Freundlich, Langmuir, Dubinin – Radushkevich, Temkin are tested for their applicability. The time-dependent Cr(VI) biosorption data were well-described by fractional power and Elovich kinetic model. Among the two-parameter models, the Langmuir model produces the best fit. Comparing our results with other previous work on the brown algae, shows the value of materials developed from *Bifurcaria bifurcata* and allows us to offer them as adsorbent materials.

**Keywords:** Hexavalent chromium, *Bifurcaria bifurcata*, Biosorption, Kinetics, Equilibrium models.

### 1. Introduction

The presence of toxic heavy metals in water resulting from rapid industrialization and technological advances is a worldwide environmental problem [1-4]. One of the heavy metals that has been a major focus in water and wastewater treatment is chromium and the hexavalent form of it has been considered to be more hazardous due to its carcinogenic properties [5-7]. Chromium has been considered as one of the top 16th. Toxic pollutants and because of its carcinogenic and teratogenic characteristics on the public, it has become a serious health concern [8]. Chromium can be released to the environment through a large number of industrial operations, including metal finishing industry, iron and steel industries and inorganic chemicals production [9]. Extensive use of chromium results in large quantities of chromium containing effluents which need an exigent treatment. The permissible limit of chromium for drinking water is 0.1 mg/L (as total chromium) in EPA standard (United States Environmental Protection Agency). In addition, World Health Organization standard for Cr(VI) concentration in drinking water is 0.05 mg/L [10-11].

Removal of heavy metals from aqueous effluents has conventionally been accomplished through a range of abiotic processes [12-14]. However, these processes can be expensive and not fully effective. Recently, increasing interest in the application of materials of biological origin in heavy metals removal from diluted, large volume solutions has been observed. Sorption with bio-materials has become an alternative to traditional methods of industrial wastewaters treatment, such as precipitation, adsorption, coagulation, ... [15-17] and it is relatively inexpensive, non-hazardous, and may permit recovery of the metals from the sorbing biomass [18]. The potential

of nonviable brown seaweeds in the recovery of heavy metal ions from aqueous effluents has been well demonstrated [19,20].

The objective of this study was to evaluate the adsorption capacity of chromium on substrates obtained from the brown seaweed *Bifurcaria bifurcata*. The choice of the latter is mainly based on purely economic considerations, because we are always looking for natural materials with no obvious utility in order to exploit them for very specific tasks, either in its raw state or after certain operations do not require large investments in energy supply or material. The main objective is to enhance this marine natural resource and use for water-pollution control and preservation of ecological balance.

## 2. Materials and methods

### 2.1 Biomass and chemical modification

The brown alga *Bifurcaria bifurcata* was collected from the Dar Bouaaza beach (Casablanca), Morocco in December 2009. The alga was washed with running water and with deionized water. The washed biomass was oven-dried at 60 °C for 24 h, crushed with an analytical mill, sieved (size fraction of 0.50 mm). The resulting dried biomass was designated as the raw biomass (RB) in the present study. A 100 g raw biomass was activated in 1M solution of hydrochloric acid at 25 °C for 2h and the mixture was separated by centrifugation and washed thoroughly with distilled water. It was dried in an oven at 60 °C for 24 h. resulting dried biomass was designated as the activated biomass (AB).

### 2.2 Sorption experiments and analytical method

All the experiments were conducted at a constant temperature of 25±1 °C and at a constant pH = 5.8 to be representative of environmentally relevant conditions. Batch kinetics and equilibrium sorption experiments were carried out in 250mL Erlenmeyer flasks containing Potassium dichromate solutions (100 mL) of known concentrations, which varied from 30 to 50 mg L<sup>-1</sup>. Known amounts of biomass were added to each flask and the mixtures were agitated on the rotary shaker. After the sorption was reached, The change in Cr(VI) concentration due to sorption was determined colorimetrically (Shimadzu 1240 spectrophotometer) according to Standard Methods [21]. A purple-violet colored complex was developed in the reaction between Cr(VI) and 1,5-diphenylcarbazide in acidic condition. Absorbance was measured at wavelength (λ) 540 nm.

### 2.3 Chromium uptake capacities

The amount of Cr(VI) sorbed at equilibrium,  $q$  (mg.g<sup>-1</sup>), which represents the metal uptake, was calculated from the difference in metal concentration in the aqueous phase before and after adsorption, according to the following equation [22] :

$$q = \frac{(C_0 - C_e) \cdot V}{m}$$

$C_0$  and  $C_e$  are the initial and equilibrium concentration of Cr(VI) in solution (mg.l<sup>-1</sup>), respectively, and  $m$  is the mass of dry seaweed (g). where  $V$  is the volume of Cr(VI) solution (L).

Fractional power [23], Elovich [24], pseudo-first order [25], pseudo-second order [24] and intraparticle diffusion [26] rate equations have been used for modeling the kinetics of Cr(VI) sorption (Table 1).

**Table 1:** Kinetic biosorption models.

Model	Equation	linear expression
Fractional power	$q_t = k_p \cdot t^v$	$\ln q_t = v \cdot \ln t + \ln k_p$
Elovich	$q_t = \frac{1}{\beta_E} \cdot \ln(\alpha_E \cdot \beta_E \cdot t)$	$q_t = \frac{\ln(\alpha_E \cdot \beta_E)}{\beta_E} + \frac{1}{\beta_E} \cdot \ln t$
pseudo-first order	$q_t = q_{e,1P}(1 - e^{-k_{1P} \cdot t})$	$\ln(q_e - q_t) = -k_{1P} \cdot t + \ln q_{e,1P}$
pseudo-second order	$q_t = \frac{k_{2P} \cdot q_{e,2P}^2 \cdot t}{1 + k_{2P} \cdot q_{e,2P} \cdot t}$	$\frac{1}{q_t} = \frac{1}{k_{2P} \cdot q_{e,2P} \cdot t} + \frac{1}{q_{e,2P}}$
Intraparticle diffusion	$q_t = k_D \cdot t^{1/2} + C_D$	-

To examine the relationship between sorbed and aqueous concentration at equilibrium, various two-parameter sorption isotherm models like Freundlich [27], Langmuir [28], Dubinin – Radushkevich [29], Temkin [30] isotherms were used for fitting the data (Table 2).

**Table 2:** Two parameter biosorption isotherm models.

Model	Equation	linear expression
Freundlich	$q_e = K_F \cdot C_e^n$	$\ln q_e = \ln K_F + n \cdot \ln C_e$
Langmuir	$q_e = \frac{q_{m,L} \cdot K_L \cdot C_e}{1 + K_L \cdot C_e}$	$\frac{1}{q_e} = \frac{1}{q_{m,L} \cdot K_L \cdot C_e} + \frac{1}{q_{m,L}}$

Dubinin – Radushkevich	$q_e = q_{m,DR} \cdot e^{-(B \cdot \epsilon^2)}$	$\text{Ln}q_e = \text{Ln}q_{m,DR} - \frac{R^2 T^2}{E^2} [\text{Ln} \left(1 + \frac{1}{C_e}\right)]^2$
Temkin	$q_e = B_T \cdot \text{Ln}(K_T \cdot C_e)$	$q_e = B_T \cdot \text{Ln}K_T + B_T \cdot \text{Ln}C_e$


### 3. Results and discussion

#### 3.1 Kinetic study

Studies on the adsorption kinetics of chemical compounds in aqueous solution are usually performed for small ranges of initial concentrations of chemical and adsorbent. The objective was primarily to study the apparent kinetics of adsorption of chromium on four supports that have been already prepared [31].

The kinetic study of biosorption of hexavalent chromium was used to determine the contact time necessary to reach equilibrium. During the contact time, the solution is kept under constant stirring and at constant temperature and pH (pH = 5.8 and T = 25 °C).

A mass of 2 g/L of each support and RB crude media activated AB are dispersed in a solution of the chromium to an initial concentration equal to  $C_0 = 50 \text{ mg/L}$ . Figure 1 shows the variation of the residual concentration  $C_{res}$  versus time t.

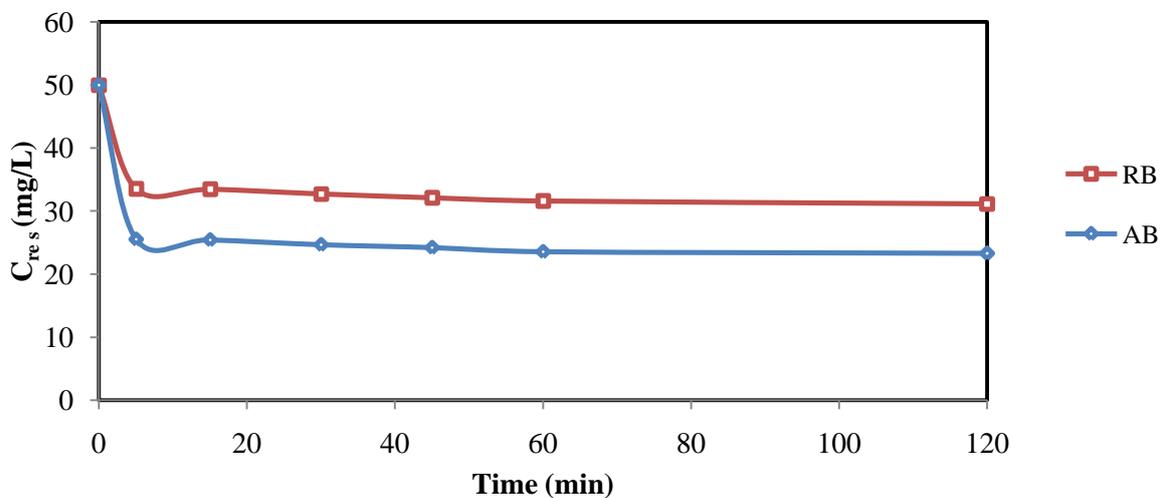

**Figure 1:** Kinetics (residual concentration of chromium  $C_{res}$  vs. time) of Cr(VI) on various forms (RB and AB) of *Bifurcaria bifurcata*.

These curves show two quite clear : A first branch reflects a rapid decrease of the residual concentration of chromium  $C_{res}$  for 20 minutes. A second branch is characterized by a gradual change of the residual concentration of chromium  $C_{res}$  until the balance of biosorption from 60 minutes.

The experimental adsorption capacities of activated biomass are higher than those of raw biomass, and the adsorption capacity of the biomass *Bifurcaria bifurcata*, it increased by 9.42 mg/g to 13.35 mg/g.

All the kinetic parameters of biosorption media RB and AB are determined from the straight linearity according to the equations of the models described in Table 1. In considering the reliability of the proposed kinetic models, we calculated the correlation coefficients of the equations and the kinetic constants of each model. These are grouped in Tables 3 and 4.

**Table 3:** Kinetic model parameters for Cr(VI) biosorption on biomasses RB of *Bifurcaria bifurcata*.

Model	linear expression	R <sup>2</sup>	Model parameters
Fractional power	$y = 0,046x + 2,012$	0,886	$v = 4,6 \cdot 10^{-2}$ $k_p = 7,478$ $v \cdot k_p = 0,343 \text{ mg} \cdot \text{g}^{-1} \cdot \text{min}^{-1}$
Elovich	$y = 0,409x + 7,391$	0,883	$\alpha_E = 2,863 \cdot 10^7 \text{ mg} \cdot \text{g}^{-1} \cdot \text{min}^{-1}$ $\beta_E = 2,444 \text{ g} \cdot \text{mg}^{-1}$
pseudo-first order	$y = -0,047x + 1,222$	0,767	$k_{1P} = 4,7 \cdot 10^{-2} \text{ min}^{-1}$ $q_{e,1P} = 3,393 \text{ mg} \cdot \text{g}^{-1}$
pseudo-second order	$y = 0,066x + 0,110$	0,577	$k_{2P} = 1,666 \text{ g} \cdot \text{mg}^{-1} \cdot \text{min}^{-1}$ $q_{e,2P} = 9,090 \text{ mg} \cdot \text{g}^{-1}$


Intraparticle diffusion	$y = 0,674x + 3,964$	0,537	$k_D = 0,674 \text{ mg}\cdot\text{g}^{-1}\cdot\text{min}^{-1/2}$ $C_D = 3,964 \text{ mg}\cdot\text{g}^{-1}$
-------------------------	----------------------	-------	--

**Table 4:** Kinetic model parameters for Cr(VI) biosorption on biomasses AB of *Bifurcaria bifurcata*.


Model	linear expression	R <sup>2</sup>	Model parameters
Fractional power	$y = 0,031x + 2,440$	0,892	$\nu = 3,1 \cdot 10^{-2}$ ; $k_p = 11,473$ $\nu \cdot k_p = 0,355 \text{ mg}\cdot\text{g}^{-1}\cdot\text{min}^{-1}$
Elovich	$y = 0,397x + 11,41$	0,890	$\alpha_E = 1,192 \cdot 10^{12} \text{ mg}\cdot\text{g}^{-1}\cdot\text{min}^{-1}$ $\beta_E = 2,518 \text{ g}\cdot\text{mg}^{-1}$
pseudo-first order	$y = -0,056x + 1,388$	0,757	$k_{1P} = 5,6 \cdot 10^{-2} \text{ min}^{-1}$ $q_{e,1P} = 4,006 \text{ mg}\cdot\text{g}^{-1}$
pseudo-second order	$y = 0,030x + 0,076$	0,597	$k_{2P} = 2,533 \text{ g}\cdot\text{mg}^{-1}\cdot\text{min}^{-1}$ $q_{e,2P} = 13,157 \text{ mg}\cdot\text{g}^{-1}$
Intraparticle diffusion	$y = 0,935x + 5,996$	0,494	$k_D = 0,935 \text{ mg}\cdot\text{g}^{-1}\cdot\text{min}^{-1/2}$ $C_D = 5,996 \text{ mg}\cdot\text{g}^{-1}$

From the values of correlation coefficients R<sup>2</sup> of these tables we can conclude that the model of fractional power (88.6% to 89.2% for RB and AB) and the Elovich model (88.3% for RB and 89% AB) are closer to the experimental results of adsorption kinetics. By cons, we note that the theoretical data from other models move away from the experimental data.

To better demonstrate the effectiveness of the model of fractional power and Elovich model, we reported in Figures 2 and 3 modeling the kinetics of chromium biosorption of these two models respectively on the two biomass RB and AB.

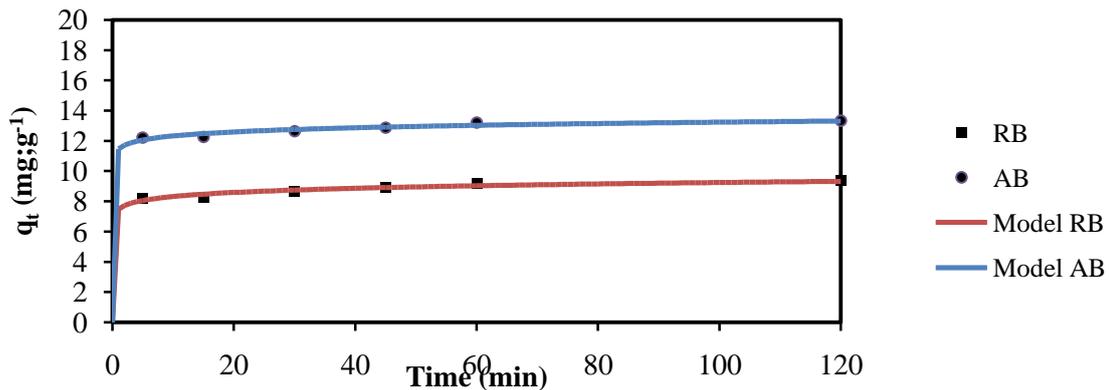

**Figure 2:** Modeling the kinetics of chromium biosorption of the fractional power model.

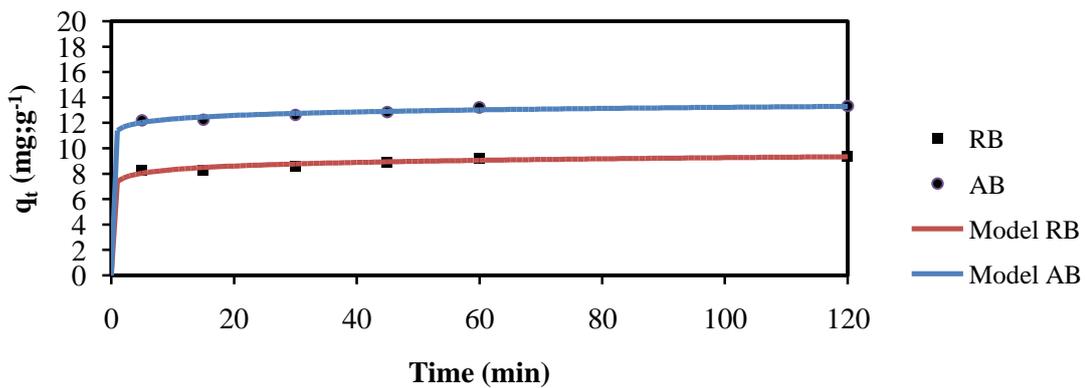


**Figure 3:** Modeling the kinetics of chromium biosorption of the Elovich model.

### 3.2. Equilibrium isotherm models

With a view to assess the adsorption capacity of chromium on each support algal prepared a study of adsorption isotherms was carried out. Recall that adsorption isotherm is also known as saturation curve and it shows the variation of the amount adsorbed  $q_t$  depending on the residual concentration at equilibrium  $C_e$  ( $q_t = f(C_e)$ ) at a temperature T and a pH consistent. (T = 25 °C, pH = 5.8)

In order to determine the nature of the adsorption isotherm of chromium on the media, we made solutions containing chromium at initial concentrations constant  $C_0 = 50 \text{ mg/L}$ , and for each medium we introduced the masses of adsorbent on the volume of the adsorbate of 0.5 g/L to 5 g/L. Stirring is continued for a sufficient time to reach equilibrium (two hours).

At the end of each experiment, we determine the residual concentrations of chromium, then we deduce the sorption capacity at equilibrium  $Q_{eq}$ . The changes in adsorption capacities at equilibrium according  $Q_{eq}$  residual concentrations at equilibrium it is the equilibrium isotherms. Equilibrium isotherms of biosorption of chromium on biomass RB and AB are represented in Figure 4.

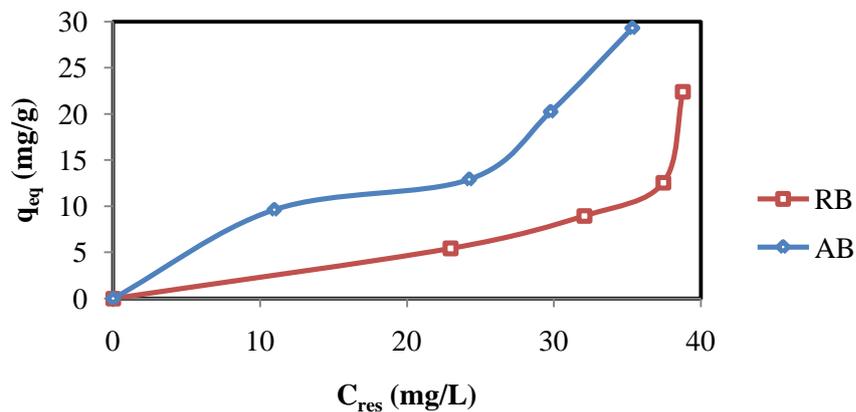

**Figure 4:** Equilibrium isotherms of biosorption of chromium on biomass RB and AB.

To process the experimental data, and to explain the isotherms obtained from equilibrium, we used isothermal models that have been previously described in Table 2. The constants characterizing each of the linear expressions of these models were determined and the data in Table 5 and Table 6 for RB and AB. Note that the reliability of these proposed models was performed by calculating the correlation coefficients  $R^2$ .

**Table 5:** Isotherms model parameters for Cr(VI) biosorption on RB.


Model	linear expression	$R^2$	Model parameters
Freundlich	$y = 2,294x - 5,585$	0,842	$n = 2,294$ $K_F = 3,75 \cdot 10^{-3} \text{ L} \cdot \text{g}^{-1}$ $q_{m,F} = 29,641 \text{ mg} \cdot \text{g}^{-1}$ $n > 1$ : adsorption faible
Langmuir	$y = 7,139x - 0,121$	0,947	$K_L = 1,69 \cdot 10^{-2} \text{ L} \cdot \text{g}^{-1}$ $q_{m,L} = 8,264 \text{ mg} \cdot \text{g}^{-1}$ $R_L = 0,54$
Dubinin – Radushkevich	$y = -971,6x + 3,374$	0,776	$B = 1,58 \cdot 10^{-4} \text{ J}^2 \cdot \text{mol}^{-2}$ $q_{m,DR} = 29,195 \text{ mg} \cdot \text{g}^{-1}$ $E = 79,446 \text{ J} \cdot \text{mol}^{-1}$
Temkin	$y = 24,87x - 74,00$	0,657	$B_T = 24,87 \text{ J} \cdot \text{mol}^{-1}$ $K_T = 5,1 \cdot 10^{-2} \text{ L} \cdot \text{g}^{-1}$ $\Delta Q = 99,57 \text{ J}$ $q_{m,T} = 23,29 \text{ mg} \cdot \text{g}^{-1}$

**Table 6:** Isotherms model parameters for Cr(VI) biosorption on AB.

Model	linear expression	$R^2$	Model parameters
Freundlich	$y = 0,856x + 0,116$	0,811	$n = 0,856$ $K_F = 1,122 \text{ L} \cdot \text{g}^{-1}$ $q_{m,F} = 31,966 \text{ mg} \cdot \text{g}^{-1}$ $0,5 < n < 1$ : adsorption modérée
Langmuir	$y = 0,971x + 0,019$	0,821	$K_L = 1,95 \cdot 10^{-2} \text{ L} \cdot \text{g}^{-1}$ $q_{m,L} = 52,631 \text{ mg} \cdot \text{g}^{-1}$ $R_L = 0,50$
Dubinin – Radushkevich	$y = -121,3x + 3,137$	0,64	$B = 1,97 \cdot 10^{-5} \text{ J}^2 \cdot \text{mol}^{-2}$ $q_{m,DR} = 23,03 \text{ mg} \cdot \text{g}^{-1}$


			$E = 224,84 \text{ J.mol}^{-1}$
Temkin	$y = 14,17x - 26,45$	0,704	$B_T = 14,17 \text{ J.mol}^{-1}$ $K_T = 0,154 \text{ L.g}^{-1}$ $\Delta Q = 174,76 \text{ J}$ $q_{m,T} = 28,98 \text{ mg.g}^{-1}$

From the values of correlation coefficients  $R^2$ , we can conclude that the Langmuir model (Figure 5) is closest to the experimental results obtained in both adsorption isotherms, (94.7% for RB, and 82.1% for AB).

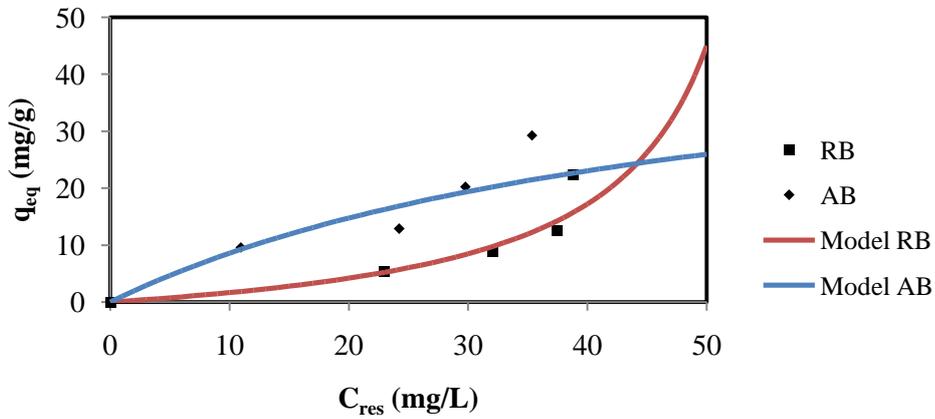

**Figure 5:** the Langmuir model of adsorption isotherms of chromium.

Other models such as the Freundlich model, the model of Dubinin – Radushkevich and the model of Temkin, show significant correlation coefficients which require them to take consideration in all models made. To better demonstrate the effectiveness of these models, we reported in Figures 6, 7 and 8 respectively, the modeling of adsorption isotherms of chromium on four supports RB and AB.

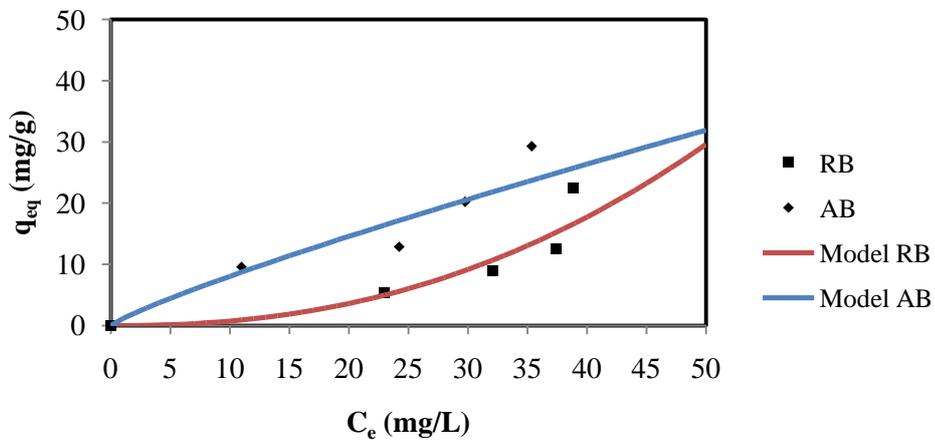

**Figure 6:** the Freundlich model of adsorption isotherms of chromium.

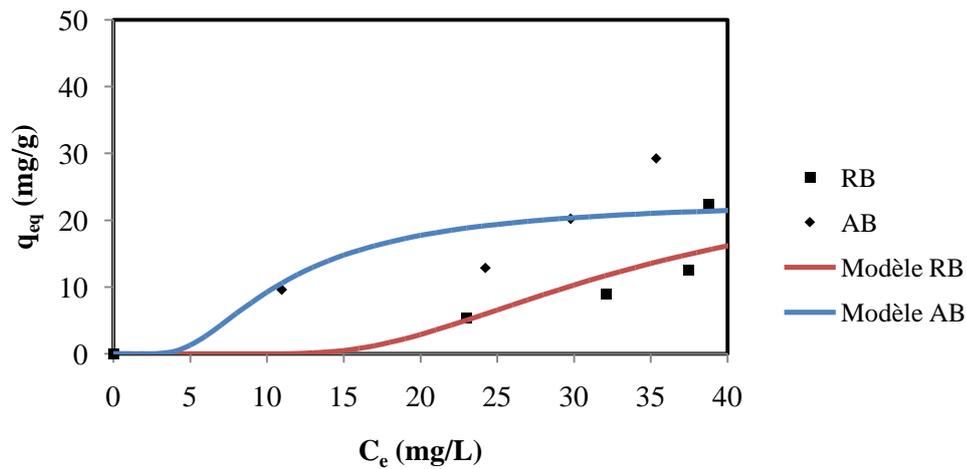


Figure 7: the Dubinin – Radushkevich model of adsorption isotherms of chromium.

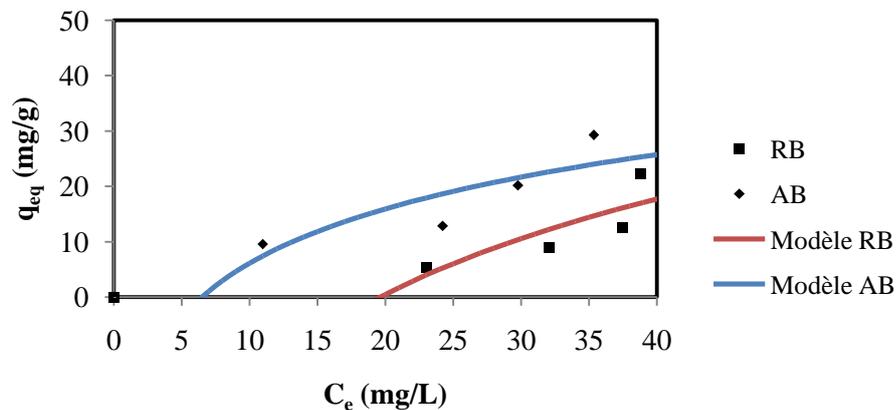


Figure 8: the Temkin model of adsorption isotherms of chromium.

### 3.3. Comparing our results with literature

To place the results we obtained in the biosorption of chromium on biomass RB and AB *Bifurcaria bifurcata*, we have shown in Table 7 the comparison of our results with those of the literature on the biosorption of chromium to other brown algae. Reading this table shows that the adsorption capacity of biomass *Bifurcaria bifurcata* have attractive valuations relative to other algal media, which allows to consider the use of biomass as adsorbent materials.

Table 7: Sorption capacities for Cr(VI) using different brown seaweeds.

Brown seaweed	q (mg.g <sup>-1</sup> )	Refs
<i>Padina sp.</i>	54,60	[32]
<i>Ecklonia</i>	4,49 mmol.g <sup>-1</sup>	[33]
<i>Pilayella littoralis</i>	4,68	[34]
<i>Sargassum siliculosum</i>	66,4	[35]
<i>Turbinaria ornata</i>	31	[36]
<i>Sargassum sp.</i>	31,72	[32]
<i>Cystoseira indica</i>	20,9 – 27,9	[37]
<i>Bifurcaria bifurcata</i>	23,4 - 29,29	Present study

## Conclusions

The results obtained during the adsorption of chromium on both biomasses prepared from the brown seaweed *Bifurcaria bifurcata*: RB and AB show that:

- The adsorption kinetics could be considered consistent with models of fractional power and Elovich.
- The modeling of adsorption isotherms by the Freundlich models, Langmuir, Dubinin - Radushkevich, and Temkin may simplify the interpretation of experimental data of isotherms put in games.
- All adsorptions isotherms obtained could be considered consistent with the Langmuir model.
- The comparison with the literature shows that one can use the raw materials and activated *Cystoseira tamariscifolia* and *Bifurcaria bifurcata* in the treatment of polluted water.

All the results obtained in this work, we have discovered new ways of valuing the algal biomass of Morocco, giving new biomass in the field of environmental applications.

## References

1. Ozer A., Akkaya G., Turabik M. *J. Hazard. Mater.* 135 (2006), 355–364.
2. Bayramoglu G., Celik G., Yalcin E., Yilmaz M., Arica M.Y. *J. Hazard. Mater.* 119 (2005) 219–229.
3. Mohan D., Pittman Jr. C.U. *J. Hazard. Mater.* 137 (2006), 762–811.
4. Kiran B., Kaushik A., Kaushik C.P. *Chem. Eng. J.*, 126 (2007) 147–153.
5. Padilla A.P., Tavani E.L. *Desalination* 126 (1999) 219–226.
6. Yabe M.J.S., De Oliveira E. *Adv. Environ. Res.* 7 (2003) 263–272.
7. Oubagaranadin J.U.K., Sathyamurthy N., Murthy Z.V.P., *J. Hazard. Mater.* 142 (2007) 165–174.
8. Gardea-Torresdey J.L., Tiemann K.J., Armendariz V., Bess-Oberto L., Chianelli R.R., Rios J., Parsons J.G., Gamez G., *J. Hazard. Mater.* 80 (2000) 175-188.
9. Gao H., Liu Guangming Zeng Y., Xu W., Li T., Xia W., *J. Hazard. Mater.* 31 (2008) 446-452.
10. EPA's recommendations for enhanced monitoring for Hexavalent Chromium (Chromium-6) in Drinking Water (2011). Available from : [www.epa.gov](http://www.epa.gov)
11. Thomas D.H., Rohrer J.S., Jackson P.E., Pak T., Scott J.N., *J. Chromato. A*, 956 (2002) 255–259.
12. Padilla A.P., Tavani E.L., *Desalination*, 126 (1999), pp. 219–226.
13. Yabe M.J.S., De Oliveira E., *Adv. Environ. Res.*, 7 (2003), 263–272.
14. Oubagaranadin J.U.K., Sathyamurthy N., Murthy Z.V.P., *J. Hazard. Mater.*, 142 (2007) 165–174.
15. Regime H.S., Viera F., Volesky B. *Int. Microbiol.*, 3 (2000), 17–24.
16. Mehta S.K., Gaur J.P., *Crit. Rev. Biotechnol.*, 25 (2005), 113–152.
17. Basha S., Murthy Z.V.P., L.G. Mason (Ed.), *Hazard. Mat. Res* (2007) pp 165–209.
18. Jalali R., Ghafourian H., Asef Y., Davarpanah S.J., Sepehr S., *J. Hazard. Mater.*, 92 (2002)253–262.
19. Davis T.A., Volesky B., Mucci A., *Water Res.*, 37 (2003), 4311–4330.
20. Yun Y.S., *J. Microbiol. Biotechnol.*, 14 (2004), 29–34.
21. Expertise In Environmental Analysis Center of Quebec. Determination of hexavalent chromium: colorimetric method, MA. 200 - CrHex 1.1, Rev. 1, *Ministry of Sustainable Development, Environment and Parks*, (2010) 10.
22. Basha S., Murthy Z.V.P., *Pro. Biochem.* 42 (2007) 1521–1529.
23. Dalal R.C., *Commun Soil Sci Plant Anal*, 5 (1974) 531–538.
24. Ho Y.S., *J. Hazard. Mater.* 136 (2006) 681–689.
25. Ho Y.S., McKay G., *Process Saf Environ Protect*, 76B (1998) 332–340.
26. Weber Jr. W.J., Morris J.C., *J. Sanitary Eng Div Am Soc Civil Eng*, 89 (SA2) (1963), 31–39.
27. Freundlich H.M.F., *Z Phys Chem (Leipzig)*, 57A (1906) 385–470.
28. Langmuir I., *J. Am Chem Soc*, 38 (1916) 2221–2295.
29. Dubinin M.M.. *Chem Rev*, 60 (1960) 235–266.
30. Temkin M.J., Pyzhev V., *Acta Physiochim USSR*, 12 (1940) 217–225.
31. Al Mardini F., Legube B. *J. Hazard. Mater.* 182 (2010) 10– 17.
32. Sheng P.X., Tan L.H., Chen J.P., Ting Y.P., *J. Disper. Sci. Technol.* 25 (2004) 679–686.
33. Park D., Yun Y.S., Park J.M. *Environ. Sci. Technol.* 38 (2004) 4860–4864.
34. Carrilho E.N., Gilbert T.R. *J. Environ. Mon.* 2 (2000) 410–415.
35. Cabatingan L.K., Agapay R.C., Rakels J.L.L., Ottens M., Van der Wielen L.A.M., *Ind. Eng. Chem. Res.*, 40 (2001) 2302.
36. Aravindhan R., Madhan B., Rao J.R., Nair B.U., *J. Chem. Technol. Biotechnol.* 79 (2004) 1251–1258.
37. Basha S., Murthy Z.V.P., Jha B., *J. Chem. Ing.* 137 (2008) 480 -488.

(2014); <http://www.jmaterenvirosci.com>